


OASIS TOUCH TECHNOLOGIES

215PTK3

21.5 INCH PCAP TOUCHSCREEN MONITOR

21.5 inch Capacitive Touch screen 10 Touch Point IP65 & Water proof
Resolution 1920*1080, Brightness 250cd/m2
VGA/DVI/HDMI, USB Touch, 12V DC

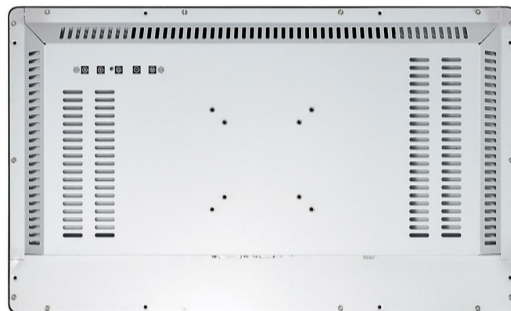

- PCAP TOUCHSCREEN MONITOR AVAILABLE IN 8" TO 55" SIZES
- WITH HIGH-PERFORMANCE COMPUTING AND GRAPHICS
- SURFACE STRUCTURE WATERPROOF CAN MEET IP65 STANDARD
- WITH 3MM TEMPERED GLASS CAN DO VANDAL-PROOF STABLE AND POWER
- TOUCH SUPPORT LINUX / ANDROID / WINDOWS OPERATION
- PCAP TOUCH SCREENS MULTI 10 POINTS TOUCH
- CUSTOMIZED FEATURES AVAILABLE

TOUCH Screen Monitor Specifications

Model	215PTK3
Series	Open Frame Touch Screens
Diagonal	21.5"
Touch Technology	Projected Capacitive 10 Touch
Touch Thickness	3.0 mm Tempered Glass
Touch Response Time	8 Msec
Touch Life Cycle	10 millions
Touch Interface	USB 2.0
Enclosure Color	Black
Chassis	Aluminum Touch Bezel+ Metal Back Cover
Seal-ability	Touchscreen sealed to bezel Touchscreen sealed to LCD
Waterproof	IP65 Waterproof Front
Aspect Ratio	16:9
Active Display Area	476.64x268.11mm
Video Input	VGA/DVI/HDMI
Resolution	1920x1080 FHD
Brightness (cd/m ²)	250 cd/m ²
Viewing Angle	89° /89° /89° /89°
Contrast	1000:1
LCD Response Time	10 Msec
Support Color	16.7M colors
Backlight MTBF(hr)	30,000 hours Demonstrated
OSD controls/Push Buttons	Brightness Adjustments Contrast Ratio Auto-adjustment Phase Clock H/V Location Languages Function Reset
Power Supply	Type: External Power Switching Adapter Input (line) voltage: 12V DC +/- 5%
Installation Interface	1)VESA Optional with back cover. 2)Mount bracket:Side Bracket/Rear Bracket Z bracket
Operating Temp.	-10~50°C
Storage Temp.	-20~60°C
Operating RH:	20%~80%
Storage RH:	10%~90%